

Product Features

- For use in awning, casement, fixed, sliding and bay windows; and sliding patio doors
- Choice of left or right-hand EasyGlide or SlimLine Operator / Ergo Track location
- Easy to maintain – clean with soap and water, or high quality window cleaner
- 10-year full warranty
- Blinds certified safe for children and pets with no exposed cords



Sizes

IG Thickness	1"
Height Range	14" to 80"
Width Range	8" to 80"
Size Increments	1/16" (height & width)
Max IG size	Annealed glass: 15 sq. ft. Tempered glass: 17 sq. ft. (no more than 36" in one direction)

Please refer to charts located on the right for custom size options.

Low-E Options

Single	270, 272, 340 and 366
Dual	189/270, 189/272, 189/340, & 189/366

Glass Coating Options

NEAT	270, 366, 189/270, & 189/366 (Tempered Glass Only)
------	---

Glass Tint Options



Solar Bronze	Solar Gray
--------------	------------

Finish Options





Blind slats, operators, operator track and decorative cover caps are available in six different colors



Custom Size Options

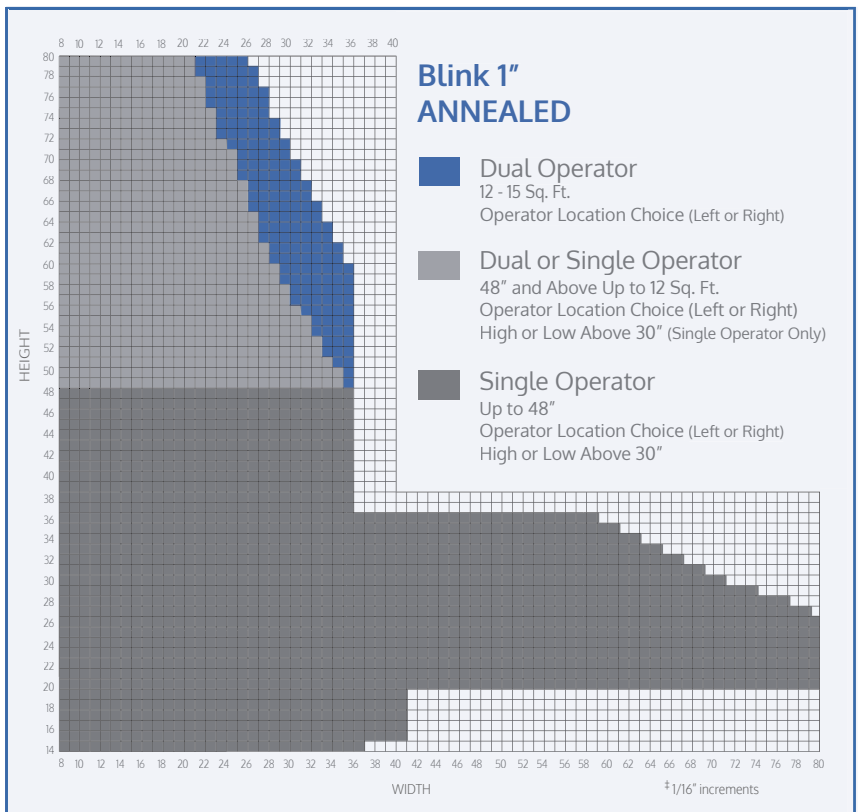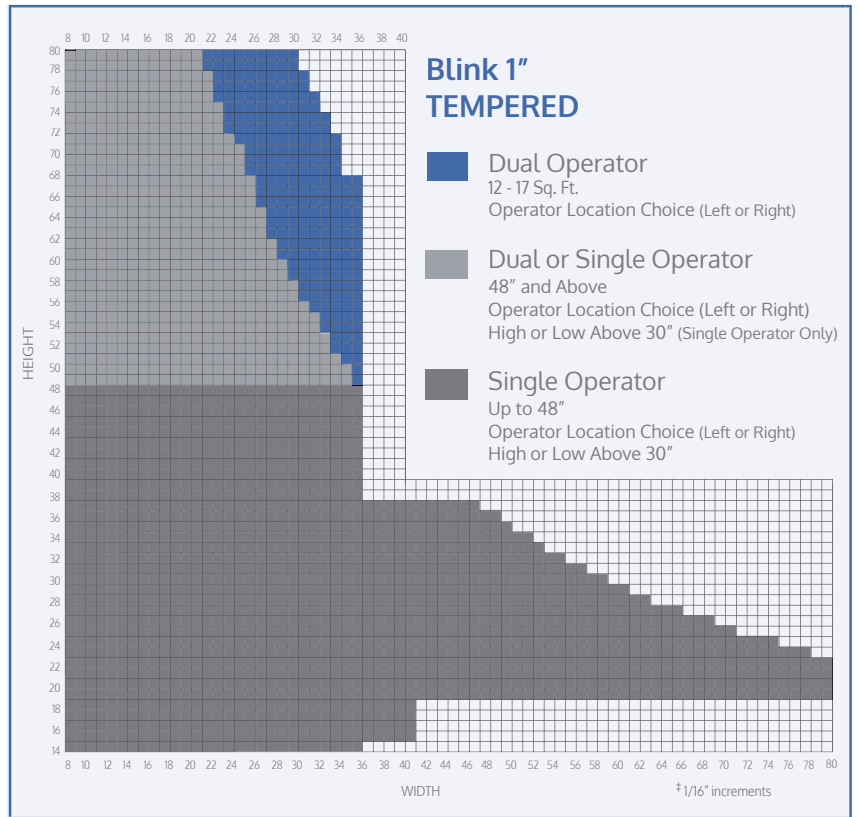

Technical Drawings & Specifications

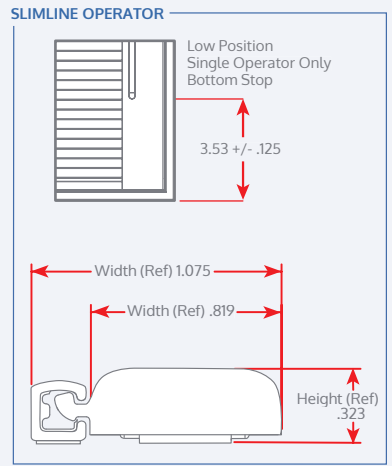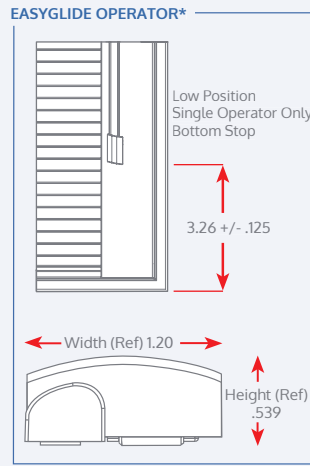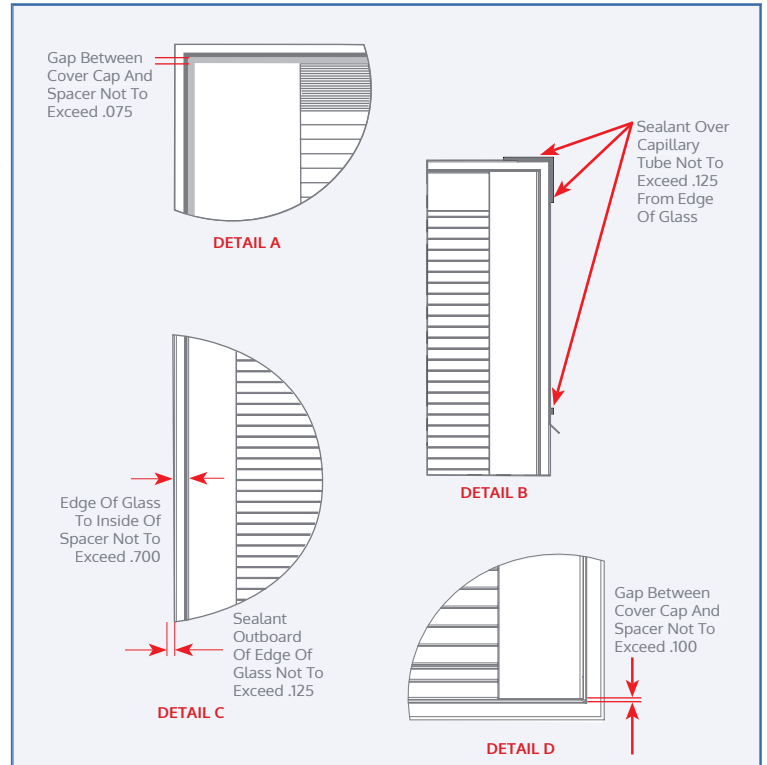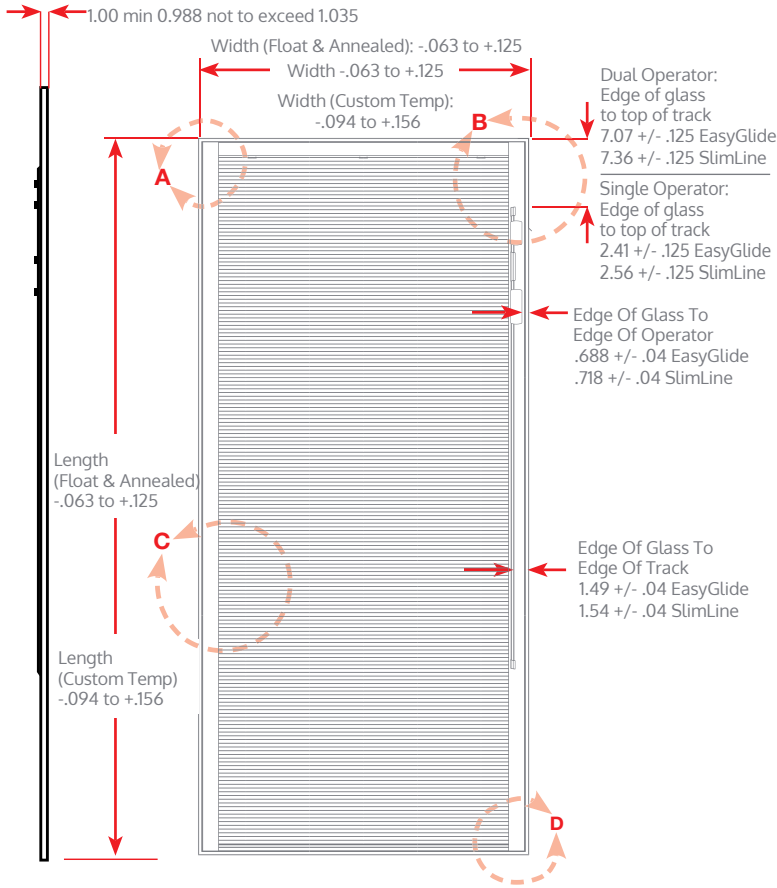

Materials	
Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	1/8" annealed or 1/8" tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (I89)
Glass Coating	NEAT: 1st surface (270, 366, I89/270, I89/366) (Tempered Glass Only)
Glass Tint	Solar Gray or Solar Bronze: glass panel 1
Blind Slat	12.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

Code of Compliance	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

Operation	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
SlimLine Operator	Single Shot
Dual Operator	Annealed glass: 12 to 15 sq. ft. Tempered glass: 12 to 17 sq. ft.
Dual or Single Operator	See size chart for details
Single Operator	Annealed glass: Up to 12 sq. ft. Tempered glass: Up to 12 sq. ft.
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 30" in height)

U.S. Patent Pending