



1" BLINDS + GLASS XL

FOR WINDOWS & SLIDING PATIO DOORS

PRODUCT FEATURES

- Use in large format sliding patio doors and windows for residential and light commercial applications
- Effortless raise, lower and tilt function available in left-hand or right-hand EasyGlide operator
- Easy to maintain, simply clean with soap and water, or high quality window cleaner
- 10-year full warranty
- Blinds certified safe for children and pets with no exposed cords



| SIZES | |
|-----------------|--|
| IG Thickness | 1" |
| Height Range | 46" to 90" |
| Width Range | 9" to 63" |
| Size Increments | 1/16" (height & width) |
| Max IG size | Tempered Only, Max area: 28 sq. ft., no more than 48" in 1 direction |

Please refer to charts located on the right for custom size options.


| LOW-E OPTIONS | |
|---------------|--------------------------------------|
| Single | 270, 272, 340 and 366 |
| Dual | 189/270, 189/272, 189/340, & 189/366 |

FINISH OPTIONS

Blind slats, operators, operator track and decorative cover caps are available in six different colors



CUSTOM SIZE OPTIONS

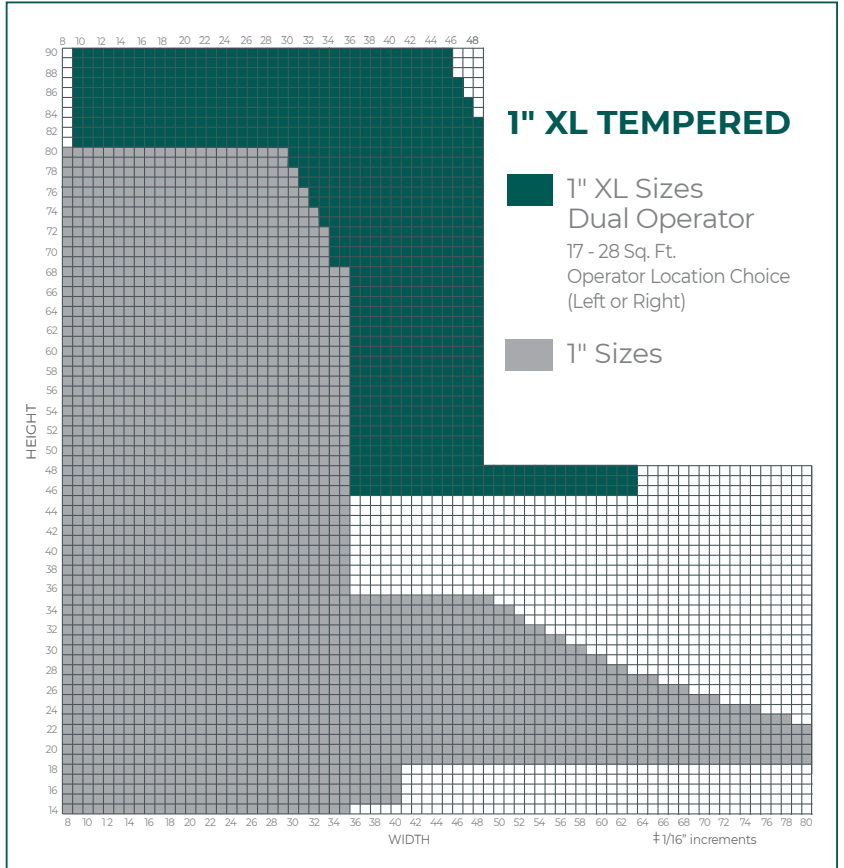




1" BLINDS + GLASS XL


FOR WINDOWS & SLIDING PATIO DOORS

TECHNICAL DRAWINGS & SPECIFICATIONS

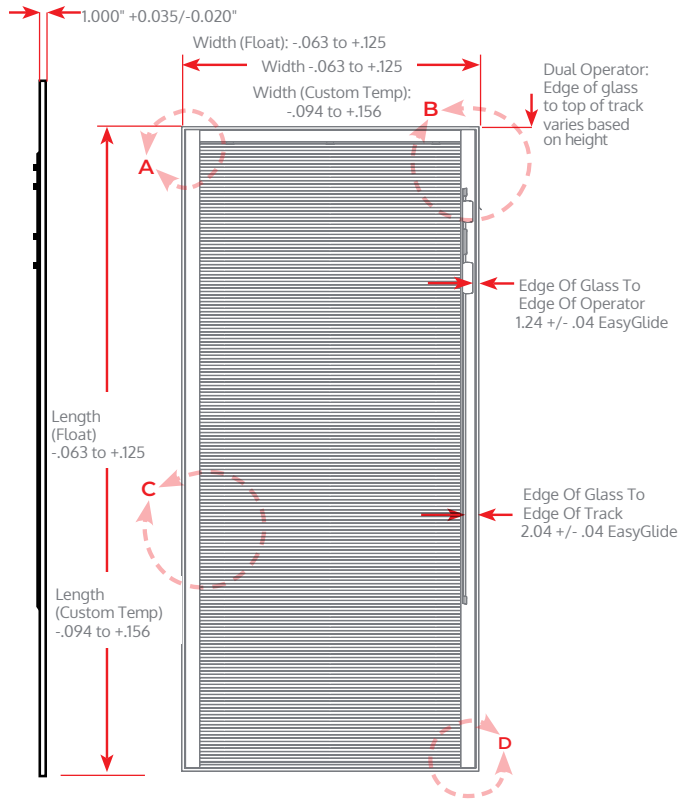

| OPERATION | |
|---------------------------|--------------------------------|
| Blind Function | Raise, Lower, and Tilt |
| EasyGlide Operator | Clear Overmold/Two Shot |
| Dual Operator | Tempered glass: Up to 28 sq ft |
| Dual Operator | See size chart for details |
| Capillary Tube | Do not block, crush or cut |
| Operator Hand | Left or right |

| CODE OF COMPLIANCE | |
|----------------------|--|
| IGCC (seal) | ASTM E2190 seal certification |
| ANSI (glass) | ANSI Z97.1 safety glazing (Applies to tempered glass only) |
| ASTM (glass) | C1048-12 (tempered) |
| ANSI (safety) | ANSI / WCMA A100.1-2018 |
| ENERGY STAR® | Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed |
| NFRC | CAD available for simulations |

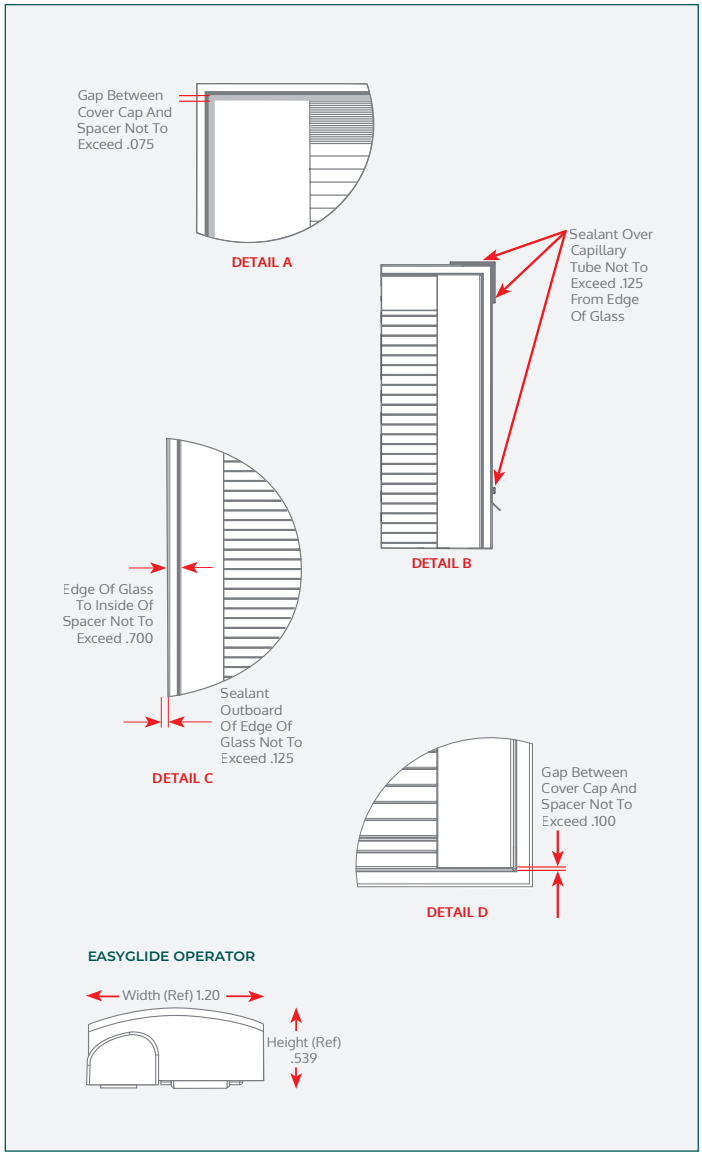

| MATERIALS | |
|----------------------------------|---|
| Spacer | Intercept®, tin plated steel |
| Glass (Standard or Low-E) | 4mm tempered safety glass |
| Single Low-E | 2nd surface soft coat (270, 272, 340, 366) |
| Dual Low-E | 4th surface hard coat Low-E (189) |
| Blind Slat | 10mm wide aluminum UV stabilized coating |
| Sealant | Dual seal equivalent |
| Desiccant | Desiccant matrix (moisture & chemical management) |
| Decorative Cover Caps | UV stabilized, heat tolerant polymer |